


PARKING LIGHT WIRE (2001-UP CHRYSLER AND DODGE MINIVAN)

- ▶ On 2001-Up Chrysler and Dodge minivans WITHOUT auto-lamps, parking lights are negative trigger thru a 2.1K-ohm resistor. There is a rest resistance on the wire, so MUST use a relay to isolate away from the switch. Wire as shown below:

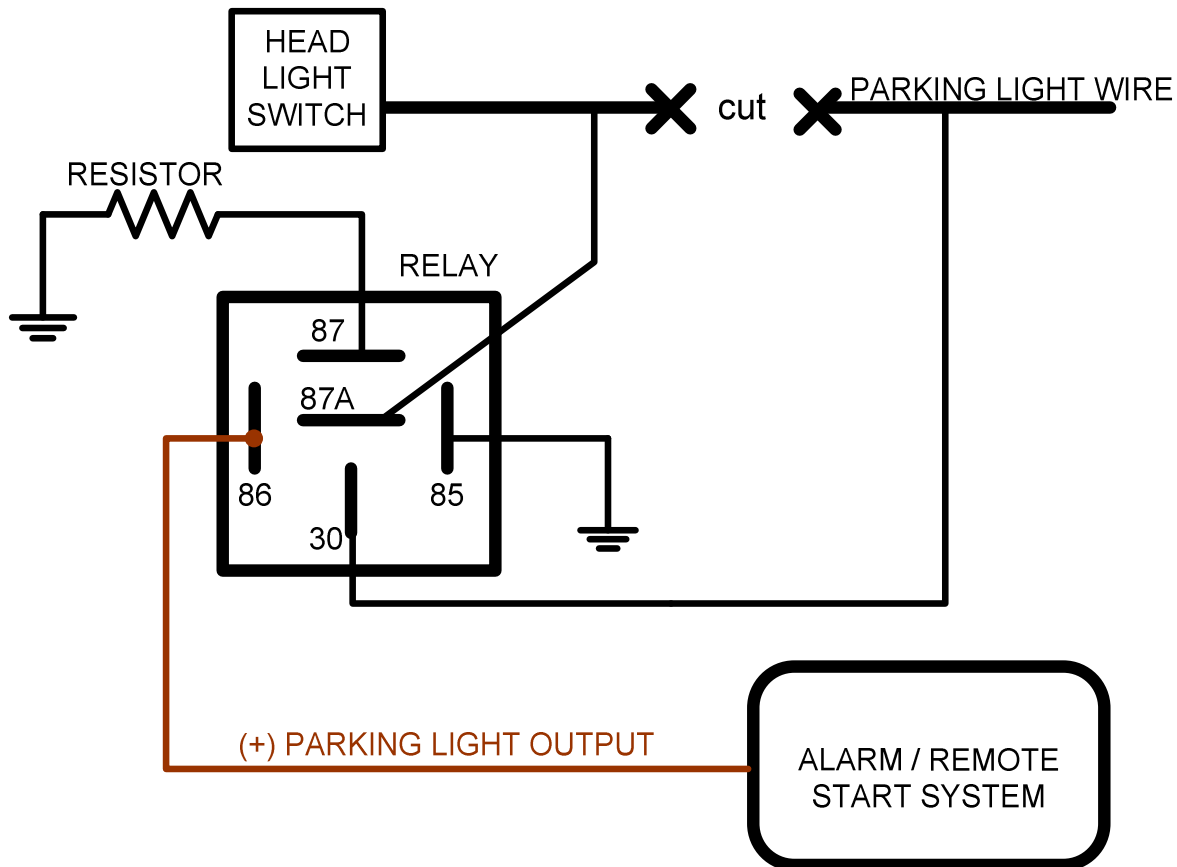

PIN	CONNECTION
85	TO CHASSIS GROUND
86	TO (+) PARKING LIGHT OUTPUT FROM ALARM/REMOTE START SYSTEM
87	TO CHASSIS GROUND WITH RESISTOR INLINE
87A	TO PARKING LIGHT WIRE – SWITCH SIDE
30	TO PARKING LIGHT WIRE – LIGHT SIDE

Remote starter and security installations should be attempted by experienced security installers only. Information contained is accurate to the best of our knowledge and experience. Information contained is without any representation of warranty. It is the installer's responsibility to test and confirm all circuits with a digital multi-meter. Proper installation remains the responsibility of the installer. CarInstallExperts.com assumes no liability or responsibility resulting from an improper installation, even in reliance with the information contained in this guide.